


# 扁平吊索

扁平吊装带采用国际上最优质的合成纤维为原料，采用国际上最先进的织造技术和设备，经过不同的缝合方式缝制而成，可根据客户需求制作4、5、6、7、8倍安全系数的吊装带，生产范围0.2t-100t。并用国际标准色来辨别不同的承载能力，亦可根据带宽来区分。在吊装作业时，对被吊物表面不会造成伤害。

Webbing sling is produced from top quality synthetic fibre by advanced international level of weaving technology and equipment in various sewing methods. According to customer's requirement, the safety factor of sling has 4:1,5:1,6:1,7:1,8:1, its loading range is from 0.2t to 100t. Which is produced according to International stanard,for color and load capacity.

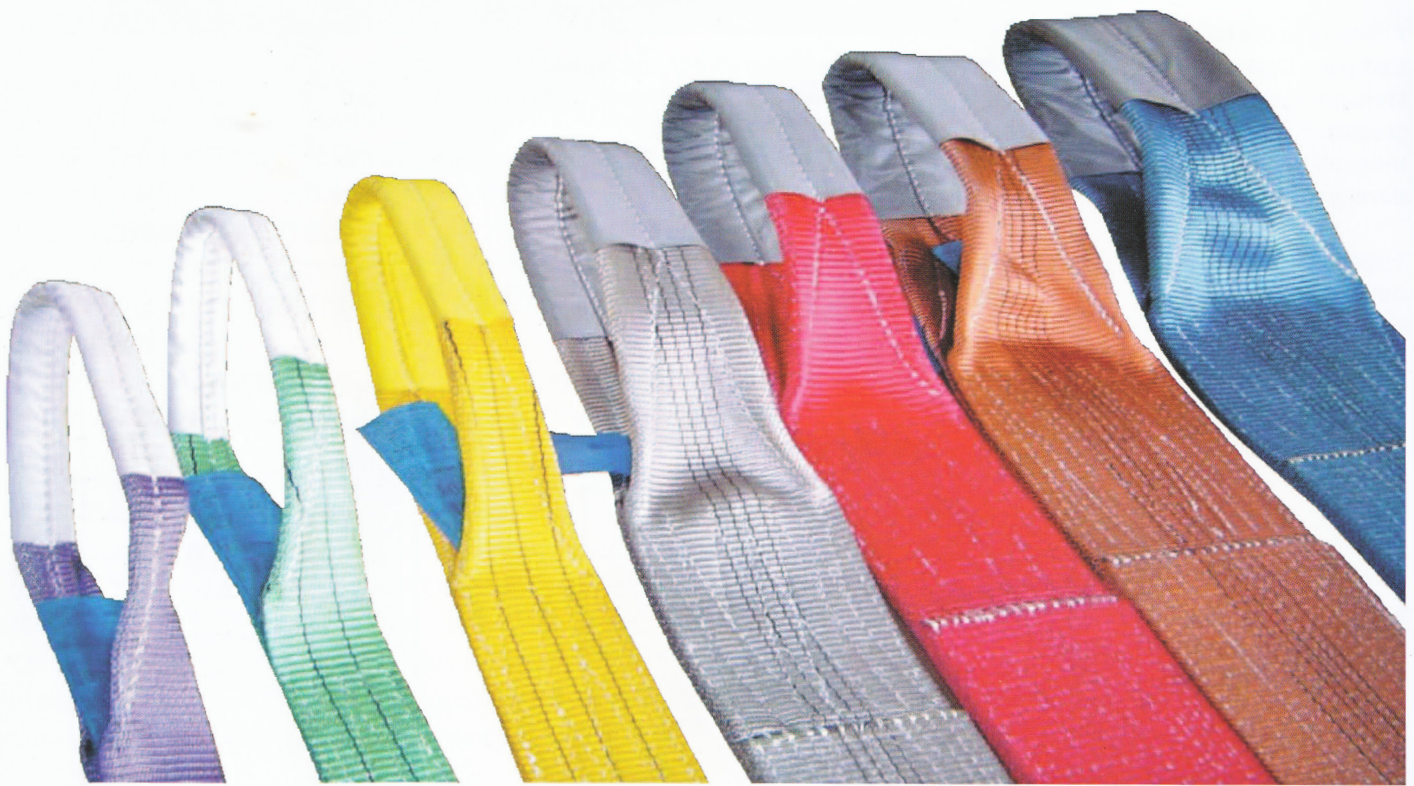


S.F	6:1			7:1			8:1		
WLL(kg)	Stock No	Width	M.B.S	Stock No	Width	M.B.S	Stock No	Width	M.B.S
1000	EE 6010	25/38mm	6t	EE 7010	30/50mm	7t	EE 8010	50mm	8t
2000	EE 6020	50mm	12t	EE 7020	60mm	14t	EE 8020	65mm	16t
3000	EE 6030	75mm	18t	EE 7030	90mm	21t	EE 8030	95mm	24t
4000	EE 6040	100mm	24t	EE 7040	120mm	28t	EE 8040	120mm	32t
5000	EE 6050	125mm	30t	EE 7050	150mm	35t	EE 8050	150mm	40t
6000	EE 6060	150mm	36t	EE 7060	180mm	42t	EE 8060	180m	48t
8000	EE 6080	200mm	48t	EE 7080	240mm	56t	EE 8080	240mm	64t
10000	EE 6100	250mm	60t	EE 7100	300mm	70t	EE 8100	300mm	80t
12000	EE 6120	300mm	72t	EE 7120	300mm	84t	/	/	/
MEMO	JB/T8521.1			EN1492.1			AS1353		

Conformity EC Council Direcive 2006/42/EC Machinery



# 扁平环眼吊索

双层扁平环眼吊索是最常被选用的一种吊索，他们有聚酯、尼龙和丙纶中的一种原料制作而成，我们可提供安全系数从5:1到8:1的各种产品，产品符合欧盟标准EN1492-1、澳大利亚标准AS1353以及我国行业标准JB/T8521.1和CE、GS安全要求，客户可以根据自己需要订购特殊长度的产品。



This is the most popular kind of webbing sling, there are made one of Polyester, Nylon, Polypropylene, the safety factor from 5:1 to 8:1 are available. We make these products according to EN1492-1, AS1353, JB/T8521.1, complied with GS CE safety require. Customers could choice special length base on special require.

Multi-ply Eye-eye Webbing Sling's PLY Stock No WLL

PLY	Stock No	WLL(t)	PLY	Stock No	WLL(t)
One ply	SEE005	0.5	Three ply	TEE015	1.5
	SEE010	1.0		TEE030	3.0
	SEE015	1.5		TEE045	4.5
	SEE020	2.0		TEE060	6.0
	SEE025	2.5		TEE075	7.5
	SEE030	3.0		TEE090	9.0
	SEE040	4.0		TEE120	12.0
	SEE0450	5.0		TEE150	15.0
Two ply	DEE010	1.0	Four ply	TEE180	18.0
	DEE020	2.0		FEE020	2.0
	DEE030	3.0		FEE40	4.0
	DEE040	4.0		FEE060	6.0
	DEE050	5.0		FEE080	8.0
	DEE060	6.0		FEE100	10.0
	DEE080	8.0		FEE120	12.0
	DEE100	10.0		FEE160	16.0
	DEE120	12.0		FEE200	20.0
			FEE240	24.0	

### Advice

1. Before use, select the correct flat webbing or round sling with regard to its application, capacity and the surface conditions of the load.
2. Please examine the condition of the webbing sling or round sling.
3. The permissible capacity of the slings must not be exceeded.
4. Never shorten a sling by knotting.
5. Flat webbing slings and round slings must not be placed around sharp edges or over rough surfaces, use wear sleeves and edge protectors where necessary.
6. Flat webbing slings should be applied in such a way, that they carry the load over the full sling width.
7. Loads may only be placed on slings if damage is precluded. Do not drag slings from under load, position the sling correctly to ensure easy removal after use.
8. Position slings in such a way, that they hold the load securely.
9. In "choke" lifts, only use flat webbing sling with reinforced eyes.
10. Using flat webbing slings with eyes, the eye opening angle should not exceed 20° at the connecting point.



Conformity EC Council Directive 2006/42/EC Machinery





## 扁平环眼吊索

### EN1492-1、JB/T8521.1标准扁平吊索类型

The type of webbing sling according to EN1492-1 or JB/T8521.1 Standard

#### Type 1 : Eye-eye webbing sling (EE)

The most popular, more versatile sling, much more kinds of sling are available Preferred types of soft eye formation are illustrated as followed.

#### Type 1: 环眼扁平化纤吊索

最常用的万能吊索，多种规格可选。如下为首选的软吊耳类型。

1) Flat eye 扁平环眼			
2) Reversed eye 翻转环眼			
3) Folded eye 1/2 width from one side 一边折叠1/2宽度环眼			
4) Folded eye 1/2 width from two side 两边折叠1/2宽度环眼			
5) Folded eye 1/3 width 折叠1/3宽度环眼			


Conformity EC Council Directive 2006/42/EC Machinery

#### 护套类型 webbing sling with protective:


to protect the slings from abrasive damage or cutting. Available in any length and width, movable or sewn to the webbing sling or roundsling. Alternatively we can supply the sling with a webbing pad.




A



B



C



D

